
MODEL 163.136 /154 /172 #A up to 145272, 163.136 /154 /172 #X up to 708318

1 Cover 2 Plug-in clips 3 Catch X58/1 Interior socket

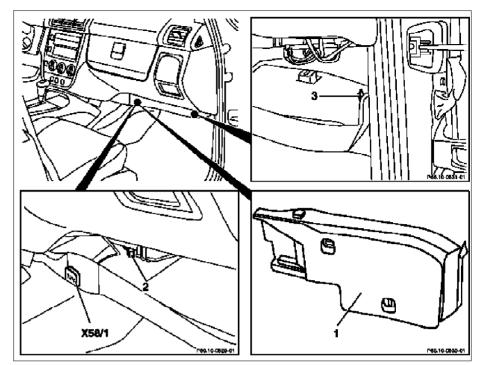

P68.10-0527-06

XX	Remove/Install		
1	Unhook catch (3) on blower motor	i Risk of breakage!	
2	Unclip cover (1)	i Cover is fastened with 2 clips (2).	
3	Disconnect electrical connector from interior socket (X58/1)		
4	Install in the reverse order		