


**MODEL 163.136 /154 /172 #A as of 145273,
163.136 /154 /172 #X as of 708319,
163.113 /128 /157 /174 /175 with CODE (352a) COMAND operating and display system
with video system**

- 1 Adapter wiring harness
- 2 COMAND coupling
- 7 3-pin coupling, interference suppression filter
- 9 Connector, adapter wiring harness



P82.60-4104-11

- 3 Voltage supply, central interface module
- 4 Central interface module
- 5 Interference suppression filter
- 6 4-pin coupling, interference suppression filter
- 8 Instrument panel support, left
- 10 Interior wiring harness

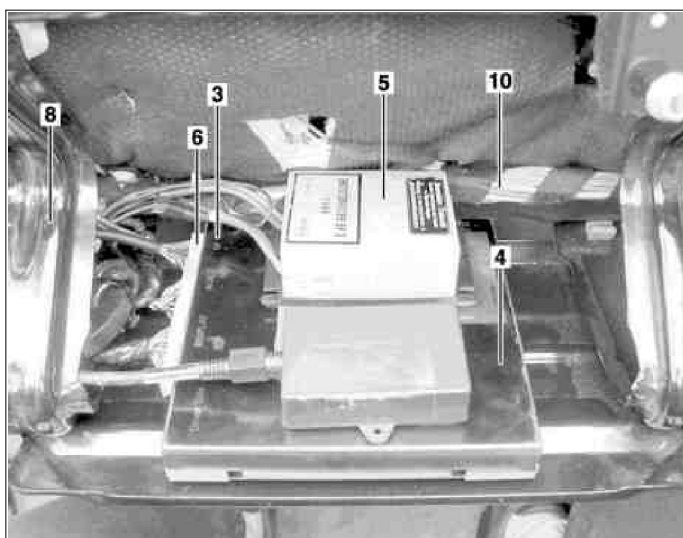

P82.60-4105-11

Operation no. of operation texts or standard texts and flat rates

Category	Op. no.	Operation text	Time	Acc. no.	Code
P	023898	Install interference suppression filter	014 WU	---	---

Remove		
1	Remove COMAND	AR82.60-P-7502EA
2	Remove glove compartment	AR68.10-P-1400GI
3	Remove FM modulator and noise filter	i If installed (see steps 3 to 5 in AF82.60-P-1005C). AF82.60-P-1005C
Install		
4	Install adapter wiring harness	i If not installed. AF82.60-P-1005-01GH
5	Place adapter wiring harness (1) onto COMAND coupling (2)	
6	Pull voltage supply coupling (3) from central interface module (4) and tie back	
7	Using velcro strip, secure interference suppression filter (5) to central interface module in place of the FM modulator	i Position is specified on the central interface module.
8	Connect 4-pin coupling (6) of interference suppression filter (5) to voltage supply (3) from central interface module (4)	

9	Route 3-pin coupling (7) of interference suppression filter (5) under the left instrument panel support (8) to the COMAND installation opening		
10	Insert 3-pin coupling (7) of interference suppression filter (5) into adapter wiring harness connector (9)		
11	Secure interference suppression filter wiring harness (5) to interior wiring harness		
12	Install glove compartment		AR68.10-P-1400GI
13	Install COMAND		AR82.60-P-7502EA
14	Function test of video system		

Parts ordering notes

Part no.	Designation	Quantity
163 540 15 09	Adapter wiring harness	as required
B6 782 6598	Interference suppression filter	1